



100%  
MADE IN ITALY



# LINDHAUS®

QUALITY CLEANING EQUIPMENT

PROFESSIONAL LINE



## LW38 Carpet Cleaner




# LW38 Carpet Cleaner

## Low-Moisture Carpet Cleaner

### STRENGTHS

- Recovers over 90% of the water used
- Lightweight: 10.6 kg
- The lightest weight on handle (1.3 kg)
- The world lowest profile: only 14 cm (5.5 in)
- Upholstery and stairs Injection/Extraction kit (optional)
- Window cleaning kit (optional)
- Minimum consumption of water and detergents

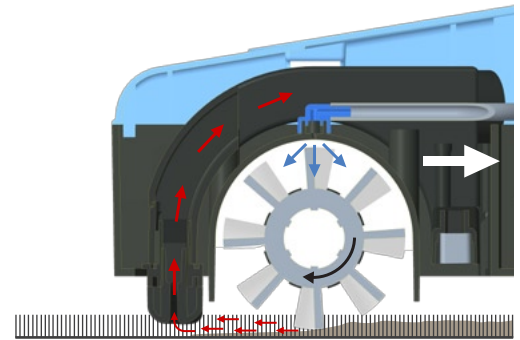

### MECHANICAL WASHING OF CARPETS AND RUGS

We have studied an innovative carpet cleaning system with a powerful mechanical action and suction which allows us to collect more than 90% of the water used for washing. Thanks to its evenly wet soft roller that rotates at 1500 RPM and a front suction nozzle, LW38 Carpet Cleaner deeply washes rugs and carpets, leaving the surfaces only slightly damp and thus significantly reducing drying time.

It is the ideal machine for washing any type of synthetic rug and carpet (to wash natural fibres, ask the manufacturer).

### INTEGRATED TANKS

The clean and dirty water tanks are integrated into one container. It is very simple to unhook and remove the tank from the machine and empty the dirty water. It can be refilled comfortably even from the lowest taps thanks to the horizontal filling.

### DETERGENT DOSING

The tank cap is also a measuring device; 26 ml of Lindhaus Textile scented deodorant detergent (diluted at 1%) are sufficient to achieve excellent results.

### WASHING WITHOUT WASTE

The clean water tank is 2.6 litres and allows you to wash for approximately 10 minutes without stopping. The 4 rubber wheels and the roller pressure adjustment always allow you an optimal use of the machine.

### ELECTRONIC CONTROL

An advanced electronic control allows the soft start of the brush motor, keeps the RPM perfectly constant (1500) and controls any overloads by signaling the correct brush roller pressure via two indicator lights, adjustable by operating the knob on the base.

### EASY DISASSEMBLY OF THE BRUSH ROLLER

The brush roller can be replaced in a few seconds and without tools: unhook the lateral support and then remove it from underneath.

### THE WORLD'S LOWEST MACHINE PROFILE

The base, 14 cm high only, allows easy access even under low furniture. The considerable inclination reachable by the vertical suction body (up to 65 cm from the ground) allows total access of the machine under the tables.



### PATENTED LIGHTNESS

The brush motor is positioned in the base and the high efficiency Bypass suction motor is located in the rotation axis of the vertical body, consequently for the operator the weight on the handle with a full tank is 1.3 kg only.

### WASHING OF UPHOLSTERY AND STAIRS

On the back of the machine there is a quick coupling to allow the injection/extraction function. With a convenient accessory kit (optional) it is possible to wash by injection/extraction stairs and chairs and sofas fabrics using the high-pressure pump and the powerful suction motor. Remove the suction hose, apply the washing kit, choose the most suitable nozzle and the machine is ready.

### TOTAL PROTECTION

The machine is equipped with a soft rubber front bumper and 4 rubber side rollers. This prevents damage to the furniture and allows you to easily clean close to the wall from both sides.

### EASY TRANSPORT

The four rubber wheels and the possibility of tilting the machine allow it to be transported from one place to another without any effort.

The extremely low weight and the practical handles allow you to lift and transport the machine anywhere or load it into the car.

### CONTROLS AT HAND

All machine functions are independent and can be selected without taking your hand off the handle.



## APPLICATION FIELDS

LW38 Carpet Cleaner can work on any type of carpet or synthetic rug. Its typical work environments are hotels, shops, offices and any other environment where textile surfaces are present.



### TECHNICAL DATA

### LW38 Carpet Cleaner

Working width - vacuum mm (in)	358 (14)
Working width - brush mm (in)	335 (13.2)
Solution tank capacity (lt.)	2.6
Recovery tank capacity (lt.)	2.6
Brush roller rotation speed (RPM)	1500
Base height mm (in)	140 (5.5)
Weight on handle full tank kg (lb)	1.3 (2.8)
Voltage/Frequency (V/Hz)	230-240/50-60
Input power (W)	900
Rotafil high-efficiency vacuum motor (W)	750
Rotafil top-performance brush motor (W)	250
Power cord length mt. (ft)	12.5 (41)
Water-lift/vacuum mm/H <sub>2</sub> O (in/H <sub>2</sub> O)	1800 (73.6)
Air flow lt./sec. (CFM)	43 (89.3)
Electronic overload control	Standard
Electronic pump control	Standard
Water dosing	Pump
Protection class	IPX4
Noise level (dbA)	70
Total net weight kg (lb)	10.6 (23.3)
Dimensions mm (in)	380x410x1130 (15x16.1x44.5)

APPROVALS:    

HEADQUARTERS • LINDHAUS SRL  
Via Belgio, 22 Z.I. 35127 • Padova, ITALY  
tel. +39 049 8700307 • fax +39 049 8700605  
vacuum@lindhaus.it • www.lindhaus.it

LINDHAUS USA  
Minneapolis • Minnesota USA  
tel. 800 498 7526 • Fax 952 707 1134  
info@lindhaus.com • www.lindhaususa.com

DEALER STAMP